

SUMMER 2017

Product comparison tables

Network video, audio and access control



Contents

4. Network cameras

- 4. Fixed box cameras
- 6. Fixed bullet cameras
- 8. Modular cameras
- 11. Fixed dome cameras
- 16. Fixed dome cameras for onboard surveillance
- 17. Pan/tilt/zoom cameras
- 22. Thermal cameras
- 23. Explosion-protected cameras
- 24. AXIS Companion Line
- 25. Canon network cameras

29. Video encoders

31. Accessories

31. System devices

32. Network video recorders

33. Network audio systems

34. Access Control

35. Video management software

36. Analytics

36. Technologies

38. ONVIF



Axis offers intelligent solutions that enable a smarter and safer world. As the market leader in network video, Axis is driving the development in the industry by continually introducing innovative network products based on open platforms, which deliver value to customers and are distributed through a global partner network.



Learn more about Axis and our total offer: www.axis.com

Axis fixed box cameras

AXIS Q16 Series												AXIS P13 Series			
	AXIS Q1659 ¹	AXIS Q1635	AXIS Q1635-E	AXIS Q1615 Mk II	AXIS Q1615-E Mk II	AXIS P1365 Mk II	AXIS P1365-E Mk II	AXIS P1364	AXIS P1364-E	AXIS P1357	AXIS P1357-E				
Max. video resolution	5472x3648	1920x1200	1920x1200	1920x1080	1920x1080	1920x1080	1920x1080	1280x960	1280x960	2592x1944	2592x1944				
Horizontal field of view	24 mm: 50° 35 mm: 36° 50 mm: 25° 85 mm: 15° 100 mm: 13° 10-22 mm: 54-97° 70-200 mm: 6-18°	102° - 33°	76° - 43.3°	115° - 39°	72° - 39°	112° - 39°	84° - 39°	92.3° - 33.3°	83° - 33.3°	92° - 32°	80° - 32°				
Day and night	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
Min. illumination Color	0.04	0.1	0.1	0.11	0.11	0.11	0.11	0.1	0.1	0.2	0.2				
Min. illumination B/W	0.004	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.04	0.04				
Max. frames per second	25	50/60	50/60	100/120	100/120	50/60	50/60	50/60	50/60	25/30	25/30				
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-	-	-	-				
Audio support	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
Built-in mic	-	✓	-	✓	-	✓	-	✓	-	✓	-				
Included analytics	Audio detection	Audio detection Shock detection	Audio detection Shock detection	Audio detection, Shock detection	Audio detection, Shock detection	Audio detection	Audio detection	Audio detection	Audio detection	Audio detection	Audio detection				
Power	PoE, DC	PoE, DC	PoE	PoE, DC	PoE	PoE, DC	PoE	PoE, DC	PoE	PoE	PoE				
Outdoor ready approvals	-	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	-	IP66/NEMA 4X				
WDR	-	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Dynamic Contrast				
Lightfinder	✓	✓	✓	-	-	✓	✓	✓	✓	-	-				
Zipstream	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-				
Built-in IR	-	-	-	-	-	-	-	-	-	-	-				
Electronic Image Stabilization	-	✓	✓	✓	✓	✓	-	-	-	-	-				
Special features	Digital PTZ, Compatible with EF/ EF-S lenses, SFP slot	1/2" Sensor, Auto rotation, Leveling assistance, Defogging	1/2" Sensor, Auto rotation, IK10, Leveling assistance, Defogging	Auto rotation, Leveling assistance, Defogging	Auto rotation, Leveling assistance, IK10, Defogging	-	IK10	-	IK10	Digital PTZ	Arctic Temperature Control, Digital PTZ				

1. Outdoor ready with AXIS T93C10 Outdoor Housing

Axis fixed box cameras

AXIS M11 Series						AXIS M10 Series				
	AXIS M115	AXIS M115-L	AXIS M125	AXIS M1125-E	AXIS M1124	AXIS M1124-E	AXIS M1065-L	AXIS M1065-LW	AXIS M1045-LW	AXIS M1025
Max. video resolution	1920x1080	1920x1080	1920x1080	1920x1080	1280x720	1280x720	1920x1080	1920x1080	1920x1080	1920x1080
Horizontal field of view	95° - 34°	95° - 34°	91° - 32°	91° - 32°	91° - 32°	91° - 32°	110°	110°	110°	94°
Day and night	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
Min. illumination Color	0.4	0.4	0.25	0.25	0.25	0.25	0.25	0.25	0.25	1.5
Min. illumination B/W	0.08	0.08	0.05	0.05	0.05	0.05	0.05'	0.05'	0.05'	-
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-	-	-
Audio support	-	-	-	-	-	-	✓	✓	-	-
Built-in mic	-	-	-	-	-	-	✓	✓	-	-
Included analytics	-	-	AXIS Cross Line Detection	Audio detection	Audio detection	-	-			
Power	PoE	PoE	PoE	PoE	PoE	PoE	USB, PoE	USB	USB	PoE
Outdoor ready approvals	-	-	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	-	-	-
WDR	Dynamic Contrast	Dynamic Contrast	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	✓	✓	✓	-
Lightfinder	-	-	-	-	-	-	-	-	-	-
Zipstream	-	-	✓	✓	✓	✓	✓	✓	✓	✓
Built-in IR	-	✓	-	-	-	-	✓	✓	✓	-
Electronic Image Stabilization	-	-	-	-	-	-	-	-	-	-
Special features	-	OptimizedIR	Digital PTZ	Digital PIZ, IK10	Digital PTZ	Digital PIZ, IK10	Built-in PIR, Digital PIZ	Built-in PIR, Digital PIZ, Wireless	Digital PIZ, Wireless	Digital PIZ, HDMI™

Axis fixed bullet cameras

AXIS Q17 Series				
	AXIS Q1775	AXIS Q1775-E	AXIS Q1765-LE	AXIS Q1765-LE PT Mount
Max. video resolution	1920x1080	1920x1080	1920x1080	1920x1080
Horizontal field of view	67.8° – 8.1°	67.8° – 8.1°	59° – 4°	59° – 4°
Day and night	✓	✓	✓	✓
Min. illumination Color	0.23	0.23	0.5	0.5
Min. illumination B/W	0.05	0.05	0.04	0.04
Max. frames per second	50/60	50/60	25/30	25/30
Zoom (Optical/Digital)	10x/12x	10x/12x	18x/12x	18x/12x
Audio support	✓	✓	✓	-
Built-in mic	✓	✓	-	-
Included analytics	Audio detection Gatekeeper	Audio detection Gatekeeper	Audio detection Gatekeeper	Gatekeeper
Power	PoE, AC/DC ^(a)	PoE, AC/DC ^(a)	PoE, AC/DC	PoE, AC/DC
Outdoor ready approvals	-	IP66/NEMA 4X	-	IP66/NEMA 4X
WDR	Dynamic Capture	Dynamic Capture	Dynamic Contrast	Dynamic Contrast
Lightfinder	-	-	-	-
Zipstream	✓	✓	-	-
Built-in IR	-	-	✓	✓
Electronic Image Stabilization	-	-	-	-
Special features	Leveling assistant, Defogging	Leveling assistant, Defogging	-	-

Axis fixed bullet cameras

	AXIS P14 Series					AXIS M20 Series	
	AXIS P1435-LE	AXIS P1428-E	AXIS P1427-LE	AXIS P1425-LE Mk II	AXIS P1405-LE Mk II	AXIS M2026-LE	AXIS M2025-LE
Max. video resolution	1920x1080	3840x2160	2592x1944	1920x1080	1920x1080	2688x1520	1920x1080
Horizontal field of view	3–10.5 mm: 95°–35° 10–22 mm: 34.5°–18°	105°–35°	92°–27°	92°–33°	93°–32°	130°	115°
Day and night	✓	✓	✓	✓	✓	✓	✓
Min. illumination Color	0.12	1.4	0.35	0.16	0.18	0.3	0.2
Min. illumination B/W	0.01	0.3	0.07	0.06	0.03	0.06 ¹	0.04 ¹
Max. frames per second	50/60	25/30	25/30	50/60	25/30	25/30	25/30
Zoom (Optical/Digital)	10.5mm: 3.5x 22mm: 2x	3x	3.5x	3.5x	3.5x	-	-
Audio support	-	-	-	-	-	-	-
Built-in mic	-	-	-	-	-	-	-
Included analytics	-	-	-	-	-	-	-
Power	PoE	PoE	PoE	PoE	PoE	PoE	PoE
Outdoor ready approvals	IP66/IP64/NEMA 4X	IP66/IP64/NEMA 4X	IP66/IP64/NEMA 4X	IP66/IP64/NEMA 4X	IP66/IP64/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	Forensic Capture	Dynamic Contrast	Dynamic Contrast	Forensic Capture	Forensic Capture	✓	Forensic Capture
Lightfinder	✓	-	-	✓	✓	-	-
Zipstream	✓	-	-	✓	✓	✓	✓
Built-in IR	✓	-	✓	✓	✓	✓	✓
Electronic Image Stabilization	-	-	-	-	-	-	-
Special features	OptimizedIR	-	OptimizedIR	OptimizedIR	-	-	-

Axis modular cameras

	AXIS F44 Dual Audio Input	AXIS F41	AXIS F34	AXIS F8804 ¹	AXIS F4005 ²	AXIS F4005-E2	AXIS F1035-E2	AXIS F1025 ²	AXIS F1015 ²	AXIS F1005-E2	AXIS F1004 ² AXIS F1004 Bullet ²	AXIS F1004 Pinhole ²	
Max. video resolution	1920x1080	1920x1200	1920 x 1080	1280x720	1920x1200	1920x1200	1920x1200	1920x1200	1920x1200	1920x1200	1280x720	1280x720	
Horizontal field of view				102°	113° ³	110° ³	194° ³	92° ³	108° - 53° ³	113° ³	102°	57°	
Day and night				-	-	-	-	-	-	-	-	-	
Min. illumination Color				0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.5	
Min. illumination B/W				-	-	-	-	-	-	-	-	-	
Max. frames per second	25/30	50/60	25/30	25/30	50/60	50/60	50/60	50/60	50/60	50/60	25/30	25/30	
Zoom (Optical/Digital)	-	-	-										
Audio support	✓	✓	-										
Built-in mic	-	-	-										
Included analytics	Audio detection	Audio detection	-										
Power	DC, PoE	DC, PoE	DC, PoE										
Outdoor ready approvals	-	-	-	-	-	IP66	IP66/NEMA 4X	-	-	IP66/NEMA 4X	-	-	-
WDR	Forensic Capture	Forensic Capture	Dynamic Contrast	-	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	-	-	-
Lightfinder	-	-	-										
Zipstream	✓	✓	✓										
Built-in IR	-	-	-										
Electronic Image Stabilization	-	-	-										
Special features	Supports 4 sensor units, Rugged, RS-232, Quad view, Corridor Format, 2x memory card slots	Supports 1 sensor unit, Rugged, RS-232, 1x memory card slot	Supports 4 sensor units, Quad view, Corridor Format, 2x memory card slots	-	-	IK09	-	-	-	-	-	-	-

¹. 3D imaging for precision counting. Use with AXIS F34/F44 and AXIS 3D People Counter². For use with AXIS F Main Units³. In 1080p

Axis modular cameras

AXIS FA Series			
	AXIS FA54	AXIS FA4115 ¹	AXIS FA1105 ¹
Max. video resolution	1920x1080	1920x1080	1920x1080
Horizontal field of view		99° - 53°	111°
Day and night		-	-
Min. illumination Color		0.2	0.2
Min. illumination B/W		-	-
Max. frames per second	25/30	25/30	25/30
Zoom (Optical/Digital)	-		
Audio support	✓		
Built-in mic	-		
Included analytics	Audio detection		
Power	DC		
Outdoor ready approvals	-	-	-
WDR	Forensic WDR	Forensic WDR	Forensic WDR
Lightfinder	-		
Zipstream	✓		
Built-in IR	-		
Electronic Image Stabilization	-		
Special features	Supports 4 sensor units, Quad view, Corridor Format, 2x memory card slots, HDMI™	-	-

¹. For use with AXIS FA Main Unit

Axis modular cameras

AXIS P12 Series							
	AXIS P1264	AXIS P1254	AXIS P1244	AXIS P1224-E	AXIS P1214	AXIS P1214-E	AXIS P8804 Stereo Sensor Kit ¹
Max. video resolution	1280x720	1280x720	1280x720	1280x720	1280x720	1280x720	1920x1200
Horizontal field of view	57°	102°	102°	145°	57°	81°	102°
Day and night	-	-	-	-	-	-	-
Min. illumination Color	0.5	0.4	0.4	0.8	1.2	1.2	0.4
Min. illumination B/W	-	-	-	-	-	-	-
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Zoom (Optical/Digital)	-	-	-	-	-	-	-
Audio support	-	-	-	-	-	-	✓
Built-in mic	-	-	-	-	-	-	-
Included analytics	-	-	-	-	-	-	Audio detection
Power	PoE	PoE	PoE	DC, PoE	DC, PoE	DC, PoE	DC, PoE
Outdoor ready approvals	-	-	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-
WDR	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	-	-	-	Forensic Capture
Lightfinder	-	-	-	-	-	-	-
Zipstream	✓	✓	✓	-	-	-	✓
Built-in IR	-	-	-	-	-	-	-
Electronic Image Stabilization	-	-	-	-	-	-	-
Special features	-	-	-	-	-	-	Metric/Imperial height strip, For eye-level surveillance

¹. 3D imaging for precision counting. Use with 3D People Counter.

Axis fixed dome cameras

	AXIS Q37 Series		AXIS Q36 Series			AXIS Q35 Series				
	AXIS Q8414-LVS	AXIS Q3709-PVE	AXIS Q3708-PVE	AXIS Q3617-VE	AXIS Q3615-VE	AXIS Q3505-V Mk II	AXIS Q3505-VE Mk II	AXIS Q3505-SVE Mk II	AXIS Q3504-V	AXIS Q3504-VE
Max. video resolution	1280x960	3x 3840x2880	3x 2560x1920	3072x2048	1920x1200	1920x1200	1920x1200	1920x1080	1280x720	1280x720
Horizontal field of view	105° - 49°	180°	180°	101° - 46°	100° - 46°	9 mm: 105° - 35° 22 mm: 36° - 15°	9 mm: 105° - 35° 22 mm: 36° - 15°	9 mm: 105° - 36° 22 mm: 36° - 15°	105° - 36°	105° - 36°
Day and night	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Min. illumination Color	0.1	2	0.3	0.15	0.1	9 mm: 0.11 22 mm: 0.17	9 mm: 0.11 22 mm: 0.17	9 mm: 0.11 22 mm: 0.17	0.11	0.11
Min. illumination B/W	0.02	0.4	0.06	0.03	0.02	9 mm: 0.02 22 mm: 0.03	9 mm: 0.02 22 mm: 0.03	9 mm: 0.02 22 mm: 0.03	0.02	0.02
Max. frames per second	25/30	25/30	25/30	25/30	50/60	100/120	100/120	100/120	100/120	100/120
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-	-	-
Audio support	✓	-	-	-	-	✓	✓	✓	✓	✓
Built-in mic	-	-	-	-	-	-	-	-	-	-
Included analytics	Audio detection	-	-	-	-	Audio detection, Gatekeeper	Audio detection, Gatekeeper	Audio detection, Gatekeeper	Audio detection	Audio detection
Power	PoE	PoE	PoE	DC, PoE	DC, PoE	PoE	PoE	PoE	PoE	PoE
Outdoor ready approvals	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X
WDR	Dynamic Contrast	Dynamic Contrast	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture
Lightfinder	✓	-	-	✓	✓	✓	✓	✓	✓	✓
Zipstream	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Built-in IR	✓	-	-	-	-	-	-	-	-	-
Electronic Image Stabilization	-	-	-	✓	✓	✓	✓	✓	✓	✓
Special features	Digital PTZ, IK10+, Stainless steel	Digital PTZ, Guard Tour, IK10	Digital PTZ, Guard Tour, IK10	Digital PTZ, IP6K9K, IK10, Remote PTRZ	Digital PTZ, IP6K9K, IK10, Remote PTRZ	Digital PTZ, Guard Tour, Leveling assistant	Digital PTZ, Guard Tour, Leveling assistant	Digital PTZ, IP6K9K, IK10+, Leveling assistant, Stainless steel	Digital PTZ, Leveling assistant	Digital PTZ, IP6K9K, IK10+, Leveling assistant

Axis fixed dome cameras

	AXIS P3707-PE	AXIS P3384-V	AXIS P3384-VE	AXIS P3367-V	AXIS P3367-VE	AXIS P3365-V	AXIS P3365-VE	AXIS P3364-V	AXIS P3364-LV	AXIS P3364-VE	AXIS P3364-LVE	AXIS P3354	
Max. video resolution	4x 1920x1080	1280x960	1280x960	2592x1944	2592x1944	1920x1080	1920x1080	1280x960	1280x960	1280x960	1280x960	1280x960	
Horizontal field of view	4x 108° - 54°	84° - 30°	84° - 30°	84° - 30°	84° - 30°	100° - 35°	100° - 35°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	
Day and night	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Min. illumination Color	0.3	0.15	0.15	0.2	0.2	0.2	0.2	6 mm: 0.1 12 mm: 0.15	6 mm: 0.1 12 mm: 0.18		6 mm: 0.1 12 mm: 0.18	6mm: 0.1 12mm: 0.15	
Min. illumination B/W	-	0.03	0.03	0.04	0.04	0.04	0.04	6 mm: 0.02 12 mm: 0.03	6 mm: 0.02 12 mm: 0.04	6 mm: 0.02 12 mm: 0.03	6 mm: 0.02 12 mm: 0.04	6mm: 0.02 12mm: 0.03	
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-	-	-	-	-	
Audio support	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	
Built-in mic	-	✓	-	✓	-	✓	-	✓	✓	-	-	-	
Included analytics	-	Audio detection	Audio detection	Audio detection-	Audio detection	Audio detection	Audio detection	Audio detection	Audio detection	Audio detection	Audio detection	-	
Power	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	
Outdoor ready approvals	IP66/IP67/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X			IP66/NEMA 4X	IP66/NEMA 4X		
WDR	-	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast							
Lightfinder	-	✓	✓	-	-	-	-	✓	✓	✓	✓	✓	
Zipstream	✓	-	-	-	-	-	-	-	-	-	-	-	
Built-in IR	-	-	-	-	-	-	-	-	✓	-	✓	-	
Electronic Image Stabilization	-	-	-	-	-	-	-	-	-	-	-	-	
Special features	Four camera heads, Quad view, IK09 Corridor Format	Digital PTZ	Digital PTZ	Digital PTZ, OptimizedIR	Digital PTZ	Digital PTZ, OptimizedIR	Digital PTZ, Tamper resistant						

Axis fixed dome cameras

	AXIS P32 Series											
	AXIS P3228-LV	AXIS P3228-LVE	AXIS P3227-LV	AXIS P3227-LVE	AXIS P3225-VMk II	AXIS P3225-LVMk II	AXIS P3225-EMk II	AXIS P3225-LEMk II	AXIS P3224-VMk II	AXIS P3224-LVMk II	AXIS P3224-EMk II	AXIS P3224-LEMk II
Max. video resolution	3840x2160	3840x2160	3072x1728	3072x1728	1920x1080	1920x1080	1920x1080	1920x1080	1280x960	1280x960	1280x960	1280x960
Horizontal field of view	100° - 38°	100° - 38°	100° - 38°	100° - 38°	92° - 34°	92° - 34°	92° - 34°	92° - 34°	90° - 34°	90° - 34°	90° - 34°	90° - 34°
Day and night	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Min. illumination Color	0.19	0.19	0.18	0.18	0.15	0.16	0.15	0.16	0.16	0.19	0.16	0.19
Min. illumination B/W	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.03	0.04
Max. frames per second	25/30	25/30	25/30	25/30	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-	-	-	-	-
Audio support	-	-	-	-	-	-	-	-	-	-	-	-
Built-in mic	-	-	-	-	-	-	-	-	-	-	-	-
Included analytics	-	-	-	-	-	-	-	-	-	-	-	-
Power	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE
Outdoor ready approvals	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	-	IP66/NEMA 4X	IP66/NEMA 4X	-	-	IP66/NEMA 4X	IP66/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture
Lightfinder	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Zipstream	✓	✓	✓	✓	-	-	-	-	-	-	-	-
Built-in IR	✓	✓	✓	✓	-	✓	-	✓	-	✓	-	✓
Electronic Image Stabilization	-	-	-	-	-	-	-	-	-	-	-	-
Special features	Digital PTZ, IK08, OptimizedIR	Digital PTZ, IK10, OptimizedIR	Digital PTZ, IK08, OptimizedIR	Digital PTZ, IK10, OptimizedIR	Digital PTZ, IP52/IK08, OptimizedIR	Digital PTZ, IP52/IK08, OptimizedIR	Digital PTZ, IK10, OptimizedIR	Digital PTZ, IK10, OptimizedIR	Digital PTZ, IP52/IK08	Digital PTZ, IP52/IK08, OptimizedIR	Digital PTZ, IK10	Digital PTZ, IK10, OptimizedIR

Axis fixed dome cameras

	AXIS M31 Series						AXIS M30 Series						
	AXIS M3106-L	AXIS M3106-LVE	AXIS M3105-L	AXIS M3105-LVE	AXIS M3104-L	AXIS M3104-LVE	AXIS M3048-P	AXIS M3047-P	AXIS M3046-V	AXIS M3045-V	AXIS M3045-VW	AXIS M3044-V	AXIS M3044-WV
Max. video resolution	2688x1520	2688x1520	1920x1080	1920x1080	1280x720	1280x720	2880x2880	2048x2048	2688x1520	1920x1080	1920x1080	1280x720	1280x720
Horizontal field of view	130°	130°	115°	115°	80°	80°	185°	185°	128°	106°	106°	82°	82°
Day and night	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-
Min. illumination Color	0.3	0.3	0.2	0.2	0.2	0.2	0.35	0.3	0.3	0.25	0.25	0.25	0.25
Min. illumination B/W	0.06	0.06	0.04	0.04	0.04	0.04	-	-	-	-	-	-	-
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	50/60	50/60	50/60	50/60	50/60
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-	-	-	-	-	-
Audio support	-	-	-	-	-	-	-	-	-	-	-	-	-
Built-in mic	-	-	-	-	-	-	-	-	-	-	-	-	-
Included analytics	-	-	-	-	-	-	-	-	-	-	-	-	-
Power	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE
Outdoor ready approvals	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	-	-	-	-	-	-
WDR	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Dynamic Contrast	Dynamic Contrast	✓	✓	✓	✓	✓
Lightfinder	-	-	-	-	-	-	-	-	-	-	-	-	-
Zipstream	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓
Built-in IR	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-
Electronic Image Stabilization	-	-	-	-	-	-	-	-	-	-	-	-	-
Special features	Digital PTZ	Digital PTZ, IK08	Digital PTZ	Digital PTZ, IK08	Digital PTZ	Digital PTZ, IK08	Digital PTZ, HDMI, Panoramic	Digital PTZ, HDMI, Panoramic	Digital PTZ, HDMI, IK08				

Axis fixed dome cameras

AXIS M30 Series								
	AXIS M3037-PVE	AXIS M3027-PVE	AXIS M3026-VE	AXIS M3025-VE	AXIS M3024-LVE	AXIS M3007-P	AXIS M3007-PV	AXIS M3014
Max. video resolution	2592x1944	2592x1944	2048x1536	1920x1080	1280x800	2592x1944	2592x1944	1280x800
Horizontal field of view	187°	187°	106°	91°	77°	187°	187°	80°
Day and night	✓	✓	✓	✓	✓	-	-	-
Min. illumination Color	0.3	0.3	0.3	0.8	0.8	0.6	0.6	1
Min. illumination B/W	0.06	0.06	0.06	0.16	0.16	-	-	-
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Zoom (Optical/Digital)	-	-	-	-	-	-	-	-
Audio support	✓	-	-	-	-	-	-	-
Built-in mic	-	-	-	-	-	-	-	-
Included analytics	Audio detection	-	-	-	-	-	-	-
Power	PoE	PoE	PoE	PoE	PoE	PoE	PoE	PoE
Outdoor ready approvals	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	-	-	-
WDR	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	-
Lightfinder	-	-	-	-	-	-	-	-
Zipstream	-	-	-	-	-	-	-	-
Built-in IR	-	-	-	-	-	-	-	-
Electronic Image Stabilization	-	-	-	-	-	-	-	-
Special features	Digital PTZ, IK10, Panoramic, SIP	Digital PTZ, IK10, Panoramic	Digital PTZ, IK10	Digital PTZ, IK10	Built-in IR, Digital PTZ, IK10	Digital PTZ, IP42, Panoramic	Digital PTZ, IP42, Panoramic	Recessed mount

Axis fixed dome cameras for onboard surveillance

Also AXIS F Series is a suitable choice for onboard surveillance in buses, emergency vehicles etc. See page 8

AXIS P39 Series

	AXIS P3915-R	AXIS P3905-R	AXIS P3905-RE	AXIS P3904-R
Max. video resolution	1920x1080	1920x1080	1920x1080	1280x720 (1 MP)
Horizontal field of view	87°	87°	56°	87°
Day and night	-	-	-	-
Min. illumination Color	0.2	0.2	0.2	0.2
Min. illumination B/W	-	-	-	-
Max. frames per second	25/30	25/30	25/30	25/30
Zoom (Optical/Digital)	-	-	-	-
Audio support	✓	-	-	-
Built-in mic	-	-	-	-
Included analytics	Audio detection	-	-	-
Power	PoE	PoE	PoE	PoE
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	-
WDR	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast
Lightfinder	-	-	-	-
Zipstream	-	-	-	-
Built-in IR	-	-	-	-
Electronic Image Stabilization	-	-	-	-
Special features	EN50155 compliance, Digital PTZ	EN50155 compliance, Digital PTZ, IP6K9K	EN50155 compliance, Digital PTZ, IP6K9K	EN50155 compliance, Digital PTZ

Axis pan/tilt/zoom cameras

AXIS Q61 Series				
	AXIS Q6155-E	AXIS Q6128-E	AXIS Q6115-E	AXIS Q6114-E
Max. video resolution	1920x1080	3840x2160	1920x1080	1280x720
Horizontal field of view	66.7° - 2.36°	70.7° - 6.2°	63.4° - 2.3°	58.3° - 2.1°
Day and night	✓	✓	✓	✓
Min. illumination Color	0.15	0.45	0.2	0.15
Min. illumination B/W	0.01	0.03	0.02	0.008
Max. frames per second	50/60	50/60	50/60	50/60
Zoom (Optical/Digital)	30/12	12/12	30/12	30/12
Audio support	✓	-	-	-
Built-in mic	-	-	-	-
Included analytics	Shock detection Autotracking Active Gatekeeper	Shock detection Autotracking Active Gatekeeper	Shock detection Autotracking Active Gatekeeper	Shock detection Autotracking Active Gatekeeper
Power	High PoE	PoE+, High PoE	High PoE	High PoE
Outdoor ready approvals	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	Forensic Capture	-	Dynamic Capture	Dynamic Capture
Lightfinder	✓	-	-	✓
Zipstream	✓	-	✓	✓
Built-in IR	-	-	-	-
Electronic Image Stabilization	✓	✓	✓	✓
Special features	Arctic temperature control , IK08, Laser focus, Sharpdome, Speed dry	Arctic temperature control, Defogging, IK08, Sharpdome, Speed dry	Arctic temperature control, Defogging, IK08, Sharpdome, Speed dry	Arctic temperature control, Defogging, Highlight compensation, IK08, Sharpdome, Speed dry

Axis pan/tilt/zoom cameras

AXIS Q60 Series								
	AXIS Q6055	AXIS Q6055-C	AXIS Q6055-E	AXIS Q6054	AXIS Q6054-E	AXIS Q6052	AXIS Q6052-E	AXIS Q6045-S Mk II
Max. video resolution	1920x1080	1920x1080	1920x1080	1280x720	1280x720	720x576	720x576	1920x1080
Horizontal field of view	62.8° - 2.23°	62.8° - 2.23°	62.8° - 2.23°	58.3° - 2.5°	58.3° - 2.5°	47.0° - 1.5°	47.0° - 1.5°	62.8° - 2.23°
Day and night	✓	✓	✓	✓	✓	✓	✓	-
Min. illumination Color	0.3	0.3	0.3	0.2	0.2	0.16	0.16	0.3
Min. illumination B/W	0.03	0.03	0.03	0.04	0.04	0.008	0.008	0.03
Max. frames per second	50/60	50/60	50/60	25/30	25/30	50/60	50/60	25/30
Zoom (Optical/Digital)	32/12	32/12	32/12	30/12	30/12	36/12	36/12	36/12
Audio support	✓	✓	-	✓	-	✓	-	-
Built-in mic	-	-	-	-	-	-	-	-
Included analytics	Active Gatekeeper, Audio detection, Autotracking, Enter/Exit detector, Fence detector, Object counter, Object removed, Shock detection	Active Gatekeeper, Audio detection, Autotracking, Enter/Exit detector, Fence detector, Object counter, Object removed, Shock detection	Active Gatekeeper, Autotracking, Enter/Exit detector, Fence detector, Object counter, Object removed, Shock detection	Audio detection, Autotracking, Active Gatekeeper, Shock detection	Active Gatekeeper, Autotracking, Shock Detection	Autotracking, Active Gatekeeper, Shock Detection, Audio detection	Active Gatekeeper, Autotracking, Shock Detection	Autotracking, Active Gatekeeper, Object removed, Enter/exit detector, Fence detector, Object counter
Power	AC/DC, PoE+	DC	High PoE	AC/DC, PoE+	High PoE	AC/DC, PoE+	High PoE	DC
Outdoor ready approvals	-	IP66/NEMA 4X Up to 75 °C (167 °F)	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X	IP66/IP67/NEMA 4X/6P
WDR	✓	✓	✓	✓	✓	✓	✓	-
Lightfinder	-	-	-	✓	✓	✓	✓	-
Zipstream	✓	✓	✓	✓	✓	✓	✓	✓
Built-in IR	-	-	-	-	-	-	-	-
Electronic Image Stabilization	-	-	-	✓	✓	-	-	-
Special features	Automatic defog, IP52, Shadows and highlights recovery	Arctic temperature control, Automatic defog, IK10, Shadows and highlights recovery	Arctic temperature control, Automatic defog, IK10, Shadows and highlights recovery	Automatic defog, Focus recall, IP52, Shadows and highlights recovery	Arctic temperature control, Automatic defog, Focus recall, IK10, Shadows and highlights recovery	Automatic defog, Focus recall, IP52, Shadows and highlights recovery	Arctic temperature control, Automatic defog, Focus recall, IK10, Shadows and highlights recovery	2xSFP slots for fiber, Automatic defog, Highlight compensation IK103/IP6K9K, MIL-STD-810G 509.5 Pressurized
								4x Cameras

Axis pan/tilt/zoom cameras

AXIS P56 Series								AXIS P55 Series		AXIS P54 Series	
	AXIS P5635-E Mk II	AXIS P5624-E Mk II	AXIS P5515	AXIS P5515-E	AXIS P5514	AXIS P5514-E		AXIS P5415-E	AXIS P5414-E		
Max. video resolution	1920x1080	1280x720	1920x1080	1920x1080	1280x720	1280x720		1920x1080	1280x720		
Horizontal field of view	65.6°-2.0°	57.9°-2.9°	59.2°-5.2°	59.2°-5.2°	59.2°-5.2°	59.2°-5.2°		59° - 4°	59° - 4°		
Day and night	✓	✓	✓	✓	✓	✓	-	-	-		
Min. illumination Color	0.2	0.2	0.7	0.7	0.7	0.7	0.5	0.4			
Min. illumination B/W	0.01	0.01	0.08	0.08	0.08	0.08	0.04	0.04			
Max. frames per second	50/60	50/60	25/30	25/30	50/60	50/60	25/30	25/30			
Zoom (Optical/Digital)	30/12	23/12	12/10	12/10	12/10	12/10	18/12	18/12			
Audio support	✓	-	✓	-	✓	-	✓	✓			
Built-in mic	-	-	-	-	-	-	-	-			
Included analytics	Audio detection Advanced Gatekeeper Shock detection	Advanced Gatekeeper Shock detection	Audio detection Advanced Gatekeeper	Advanced Gatekeeper	Audio detection Advanced Gatekeeper	Advanced Gatekeeper	Audio detection Advanced Gatekeeper	Audio detection Advanced Gatekeeper			
Power	AC/DC, PoE	PoE	AC/DC, PoE	AC/DC, PoE	AC/DC, PoE	AC/DC, PoE	DC, PoE+	DC, PoE+			
Outdoor ready approvals	IP66/NEMA 4X	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X			
WDR	Forensic Capture	Forensic Capture	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast	-	-			
Lightfinder	-	-	-	-	-	-	-	-			
Zipstream	✓	✓	✓	✓	✓	✓	-	-			
Built-in IR	-	-	-	-	-	-	-	-			
Electronic Image Stabilization	✓	-	-	-	-	-	-	-			
Special features	IK10, Focus recall	IK10, Focus recall	IP51	-	IP51	-	Built-in wall bracket, Direct drive pan/tilt system	Built-in wall bracket, Direct drive pan/tilt system			

Axis pan/tilt/zoom cameras

	AXIS M50 Series				AXIS V59 Series	
	AXIS M5014	AXIS M5014-V	AXIS M5013	AXIS M5013-V	AXIS V5915	AXIS V5914
Max. video resolution	1280x720	1280x720	800x600	800x600	1920x1080	1280x720
Horizontal field of view	60°	60°	45°	45°	63.7°	58.3°
Day and night	-	-	-	-	✓	✓
Min. illumination Color	1.4	1.4	1.4	1.4	1.0	0.6
Min. illumination B/W	-	-	-	-	0.03	0.03
Max. frames per second	25/30	25/30	25/30	25/30	50/60	50/60
Zoom (Optical/Digital)	-/3	-/3	-/3	-/3	30/12	30/12
Audio support	✓	-	✓	-	✓	✓
Built-in mic	✓	-	✓	-	-	-
Included analytics	Audio detection	-	Audio detection	-	-	-
Power	PoE	PoE	PoE	PoE	DC	DC
Outdoor ready approvals	-	IP66	-	IP66	-	-
WDR	-	-	-	-	Dynamic Capture	Dynamic Capture
Lightfinder	-	-	-	-	-	-
Zipstream	-	-	-	-	-	-
Built-in IR	-	-	-	-	-	-
Electronic Image Stabilization	-	-	-	-	✓	✓
Special features	IP51	IK10	IP51	IK10	2x Canon XLR3, 3G-SDI, HDMI	2x Canon XLR3, 3G-SDI, HDMI

Axis pan/tilt/zoom cameras

AXIS Q86 Series				
	AXIS Q8665-LE	AXIS Q8665-E	AXIS Q8632-E	AXIS Q8631-E
Max. video resolution	1920x1080	1920x1080	640x480	384x288
Horizontal field of view	59° - 4°	59° - 4°	18°	10.7°
Day and night	✓	✓	-	-
Min. illumination Color	0.5	0.5	-	-
Min. illumination B/W	0	0.04	-	-
Max. frames per second	25/30	25/30	8.3/30 ¹	8.3/30 ¹
Pan/Tilt	360° endless / +90° to -40°	360° endless / +90° to -40°	360° endless / +90° to -40°	360° endless / +90° to -40°
Zoom (Optical/Digital)	18/12	18/12	-	-
Sensitivity	-	-	NETD < 70 mK	NETD < 70 mK
Detection range (m/yd.)	-	-	1050/1148 ² 3200/3500 ³	1030/1126 ² 3100/3390 ³
Included analytics	-	-	Shock detection	Shock detection
Power	AC	AC	AC	AC
Outdoor ready approvals	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	Dynamic Contrast	Dynamic Contrast	-	-
Lightfinder	-	-	-	-
Zipstream	-	-	-	-
Built-in IR	✓	-	-	-
Special features	-	-	Palette setting, Uncooled microbolometer	Palette setting, Uncooled microbolometer

¹. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations². Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria³. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria

Axis thermal cameras

AXIS Q29 Series							AXIS Q19 Series	
	AXIS Q2901-E	AXIS Q2901-E PT Mount	AXIS Q1942-E	AXIS Q1942-E PT Mount	AXIS Q1941-E	AXIS Q1941-E PT Mount		
Max. video resolution	336x256	336x256	640x480	640x480	384x288	384x288		
Horizontal field of view	9 mm: 35° 19 mm: 17°	9 mm: 35° 19 mm: 17°	10 mm: 63° 19 mm: 32° 35 mm: 17° 60 mm: 10°	10 mm: 63° 19 mm: 32° 35 mm: 17° 60 mm: 10°	7 mm: 55° 13 mm: 28° 19 mm: 19.4° 35 mm: 10.7° 60 mm: 6.2°	7 mm: 55° 13 mm: 28° 19 mm: 19.4° 35 mm: 10.7° 60 mm: 6.2°		
Max. frames per second	8.3	8.3	8.3/30 ¹	8.3/30 ¹				
Object temperature range	-40 °C to 550 °C (-40 °F to 1022 °F)	-40 °C to 550 °C (-40 °F to 1022 °F)	-	-				
Sensitivity	NETD < 50 mK	NETD < 50 mK	NETD < 50 mK	NETD < 50 mK	NETD < 70 mK	NETD < 70 mK		
Detection range (m/yd.)	-	-	10 mm: 291/318 ^(c) 892/978 ^(d) 19 mm: 573/627 ^(c) 1757/1921 ^(d) 35 mm: 1079/1179 ^(c) 3307/3617 ^(d) 60 mm: 1833/2005 ^(c) 5623/6149 ^(d)	10 mm: 291/318 ^(c) 892/978 ^(d) 19 mm: 573/627 ^(c) 1757/1921 ^(d) 35 mm: 1079/1179 ^(c) 3307/3617 ^(d) 60 mm: 1833/2005 ^(c) 5623/6149 ^(d)	7 mm: 200/219 ^(c) 613/671 ^(d) 13 mm: 393/430 ^(c) 1205/1318 ^(d) 19 mm: 567/620 ^(c) 1739/1902 ^(d) 35 mm: 1028/1124 ^(c) 3153/3448 ^(d) 60 mm: 1774/1940 ^(c) 5441/5951 ^(d)	7 mm: 200/219 ^(c) 613/671 ^(d) 13 mm: 393/430 ^(c) 1205/1318 ^(d) 19 mm: 567/620 ^(c) 1739/1902 ^(d) 35 mm: 1028/1124 ^(c) 3153/3448 ^(d) 60 mm: 1774/1940 ^(c) 5441/5951 ^(d)		
Audio support	✓	-	✓	-	✓	-		
Built-in mic	-	-	-	-				
Included analytics	Audio detection Cross Line Detection Shock detection	Cross Line Detection Shock detection	Audio detection Shock detection	Shock detection	Audio detection Shock detection	Shock detection		
Power	AC/DC, PoE	AC/DC, PoE	AC/DC, PoE	AC/DC, PoE	AC/DC, PoE	AC/DC, PoE		
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/NEMA 4X	IP66/IP67/NEMA 4X	IP66/NEMA 4X	IP66/IP67/NEMA 4X	IP66/NEMA 4X		
Zipstream	-	-	✓	✓	✓	✓		
Electronic Image Stabilization	-	-	✓	✓	✓	✓		
Special features	Corridor Format, Isothermal palette, Palette setting, Uncooled microbolometer	Isothermal palette, Palette setting, Uncooled microbolometer	Corridor Format, Palette setting, Uncooled microbolometer	Palette setting, Uncooled microbolometer	Corridor Format, Palette setting, Uncooled microbolometer	Palette setting, Uncooled microbolometer		

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations

2. Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria

3. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria

Explosion-protected cameras

						
Max. video resolution	336x256	336x256	640x480	1920x1080	1920x1080	1920x1080
Horizontal field of view	17°	17°	32°	59° - 4°	59° - 4°	59° - 4°
Min. illumination Color	-	-	-	0.5	0.5	0.5
Min. illumination B/W	-	-	-	0.04	0.04	0.04
Max. frames per second	8.3	8.3	8.3	25/30	25/30	25/30
Object temperature range	-40 °C to 550 °C (-40 °F to 1022 °F)	-40 °C to 550 °C (-40 °F to 1022 °F)	-	-	-	-
Sensitivity	NETD < 50 mK	NETD < 50 mK	NETD < 50 mK			
Detection range (m/yd.)		-	567/620 ² 1739/1902 ³	-	-	-
Zoom (Optical/Digital)		-	-	18/12	18/12	18/12
Included analytics	Shock detection	Shock detection	Shock detection	-	-	-
Power	AC	AC	AC	AC	AC	AC
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/IP69/NEMA 4X	IP66/IP67/IP69/NEMA 4X	IP66/IP67/NEMA 4X
WDR	-	-	-	Dynamic Contrast	Dynamic Contrast	Dynamic Contrast
Lightfinder	-	-	-	✓		
Zipstream	✓	✓	✓	-	-	-
Electronic Image Stabilization	-	-	✓	-	-	-
Special features	Uncooled microbolometer, UL-certified, Stainless steel,	Uncooled microbolometer, Stainless steel, Worldwide certifications	Uncooled microbolometer, Stainless steel, Worldwide certifications	Digital PTZ, UL-certified, Stainless steel	Stainless steel, Worldwide certifications	Stainless steel, Worldwide certifications

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations

2. Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria

3. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria

AXIS Companion VMS

Video management software with PC-client and mobile app, remote access, quick system set-up.



AXIS Companion Recorders

Network video recorder with PoE switch and surveillance-grade hard disk.

AXIS Companion Recorder 4CH 1TB
AXIS Companion Recorder 8CH 2TB
AXIS Companion Recorder 8CH 4TB



AXIS Companion System accessories

System accessories to expand the solution.

AXIS Companion Switch 4CH



AXIS Companion Wireless

AXIS Companion Dome WV including AXIS Companion Card 64GB
AXIS Companion Cube LW including AXIS Companion Card 64GB



AXIS Companion Dome		AXIS Companion Cube		AXIS Companion Eye		AXIS Companion Bullet
-V	-WV	-L	-LW	-L	-LVE	-LE
Max. video resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
Horizontal field of view	106°	110°	115°	115°		115°
Day and night	-	✓	✓	✓		✓
Min. illumination Color	0.25	0.25	0.2	0.2		0.2
Min. illumination B/W	-	0.05	0.04	0.04		0.04
Audio support	-	✓	-	-		-
Built-in Mic	-	✓	-	-		-
Power	PoE	USB	PoE	USB	PoE	PoE
Outdoor ready	-	-	-	-	IP66/NEMA 4X	IP66/NEMA 4X
WDR	✓	✓	✓	✓		✓
Zipstream	✓	✓	✓	✓		✓
Built-in IR	-	-	✓	✓		✓
Wireless	-	✓	-	✓	-	-
Special features	HDMI™, IK08/IP42		Built-in PIR, Built-in speaker		IP42	IK08
						IK08

AXIS Companion IP cameras are supported only by AXIS Companion video management software and mobile apps for iOS and Android devices.

Canon fixed network cameras

	VB-H761LVE	VB-H760VE	VB-H751LE	VB-S910F
				
Max. video resolution (pixels)	1920x1080	1920x1080	1920x1080	1920x1080
Horizontal field of view	60.4° – 3.2°	60.4° – 3.2°	124.3° – 50.5°	78.6° – 20.8°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/4.85"
Lens	4.7 – 94 mm (0.19" – 3.7") F1.6 – F3.5 Autofocus 20x optical, 20x digital zoom	4.7 – 94 mm (0.19" – 3.7") F1.6 – F3.5 Autofocus 20x optical, 20x digital zoom	2.55 – 6.12 mm (0.1" – 0.24") F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom	2.25 – 7.88 mm F1.4 – F2.6 Autofocus 3.5x optical, 4x digital zoom
Day and night	✓	✓	✓	✓
Min. illumination (lux)	0.06 (Color) 0.04 (B/W)	0.06 (Color) 0.003 (B/W)	0.035 (Color) 0.002 (B/W)	0.95 (Color) 0.5 (B/W)
Frames per second (50/60 Hz)	30	30	30	30
Pan/Tilt/Zoom	Digital PTZ	Digital PTZ	Digital PTZ	Digital PTZ
Audio support	Two-way	-	Two-way	Two-way
Alarm in-/outputs	2/2	-	2/2	2/2
Additional analytics*	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection, Abandoned Object Detection, Removed Object Detection, Camera Tampering Detection, Passing Detection, Intrusion Detection, Volume Detection
Power	AC/DC PoE IEEE 802.3at Type 1/Type 2	PoE IEEE 802.3at Type 1	AC/DC PoE IEEE 802.3at Type 1/Type 2	PoE IEEE 802.3at Type 2
Outdoor ready	● (down to -50°C/-58°F)	●	●	-
Other	Clear IR Mode and built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	ONVIF Profile S, Memory card slot

Canon fixed dome network cameras

	VB-H652LVE	VB-H651VE	VB-S800VE
Max. video resolution (pixels)	1920x1080	1920x1080	1920x1080
Horizontal field of view	122.1° – 50.1°	122.1° – 50.1°	93.8°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	2.55 – 6.12 mm (0.1" – 0.24") F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom	2.55 – 6.12 mm (0.1" – 0.24") F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom	2.7 mm (0.11") F1.6 4x digital zoom
Day and night	●	●	●
Min. illumination (lux)	0.035 (Color) 0.002 (B/W)	0.035 (Color) 0.002 (B/W)	0.5 (Color) 0.3 (B/W)
Frames per second (50/60 Hz)	30	30	30
Pan/Tilt/Zoom	Digital PTZ	20 presets 350° pan 150° tilt	20 presets 350° pan 90° tilt
Audio support	Two-way	Two-way	Two-way
Alarm in-/outputs	2/2	2/2	1/1
Additional analytics*	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection
Power	AC/DC PoE IEEE 802.3at Type 1/Type 2	AC/DC PoE IEEE 802.3at Type 1	PoE IEEE 802.3at Type 2
Outdoor ready	●	●	●
Other	Ultra wide-angle lens, Built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Ultra wide-angle lens, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Ultra wide-angle lens, Ultra Low Dispersion, Motion Adaptive Noise Reduction, IK10, ONVIF Profile S, Memory card slot

Canon pan/tilt/zoom network cameras

VB-R13VE



VB-M50B



Max. video resolution (pixels)	1920x1080 (2.1 MP)	1280x960 (1.3 MP)
Horizontal field of view	62.6° – 2.2°	15.6° – 3.2°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	4.4 – 132 mm (0.17" – 5.2") F1.4 – F4.6 Autofocus 30x optical, 20x digital zoom	17.7 – 88.5 mm (0.7" – 3.48") F1.8 – F2.4 Autofocus 5x optical, 20x digital zoom
Day and night	●	●
Min. illumination (lux)	0.05 (Color) 0.002 (B/W)	0.04 (Color) 0.002 (B/W)
Frames per second (50/60 Hz)	30	30
Pan/Tilt/Zoom	256 presets 360° endless pan 180° tilt	64 presets 348° pan -90° to +15° tilt
Audio support	Two-way	Two-way
Alarm in-/outputs	2/2	2/2
Additional analytics*	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection Autotracking	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection
Power	AC/DC PoE IEEE 802.3at Type 1/Type 2	AC/DC PoE IEEE 802.3at Type 1
Outdoor ready	● (down to -50°C / -58°F)	-
Other	Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Large aperture telephoto lens, Clear IR Mode, Motion-Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot

Canon pan/tilt/zoom network cameras

	VB-H43	VB-H43B	VB-M42	VB-M42B	VB-S30D	VB-S30VE
Max. video resolution (pixels)	1920x1080		1280x960		1920x1080	1920x1080
Horizontal field of view	60.4° – 3.2°		60.4° – 3.2°		77.7° – 20.7°	77.1° – 20.6°
Image sensor	Progressive scan CMOS 1/3"		Progressive scan CMOS 1/3"		Progressive scan CMOS 1/4.85"	Progressive scan CMOS 1/4.85"
Lens	4.7 – 94 mm (0.19" – 3.7") F1.6 – F3.5 Autofocus 20x optical, 12x digital zoom		4.7 – 94 mm (0.19" – 3.7") F1.6 – F3.5 Autofocus 20x optical, 12x digital zoom		2.25 – 7.88 mm (0.1" – 0.3") F1.4 – F2.6 Autofocus 3.5x optical, 4x digital zoom	2.25 – 7.88 mm (0.1" – 0.3") F1.4 – F2.6 Autofocus 3.5x optical, 4x digital zoom
Day and night	•		•		-	•
Min. illumination (lux)	0.4 (Color) 0.02 (B/W)		0.4 (Color) 0.02 (B/W)		0.95 (Color) 0.5 (B/W)	1.0 (Color) 0.55 (B/W)
Frames per second (50/60 Hz)	30		30		30	30
Pan/Tilt/Zoom	64 presets 340° pan -90° to +10° tilt		64 presets 340° pan -90° to +10° tilt		20 presets 350° pan -90° to 0° tilt	20 presets 350° pan -90° to 0° tilt
Audio support	Two-way		Two-way		One-way	One-way
Alarm in-/outputs	2/2		2/2		1/1	1/1
Additional analytics*	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection		Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection		Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection
Power	AC/DC PoE IEEE 802.3af		AC/DC PoE IEEE 802.3af		PoE IEEE 802.3af	PoE IEEE 802.3af
Outdoor ready	-		-		-	•
Other	Silver	Black	Silver	Black	Memory card slot	Motion Adaptive Noise Reduction, Area-specific Data Size Reduction, IK10, Onvif Profile S,
	Memory card slot		Memory card slot			

Video encoders

AXIS Q74 Series						
	AXIS Q7436	AXIS Q7424-R Mk II	AXIS Q7414	AXIS Q7411	AXIS Q7404	AXIS Q7401
Max. video resolution	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)
Max. frames per second	50/60	25/30	25/30	50/60	25/30	25/30
Video source (BNC composite inputs)	6	4	4	1	4	1
Audio support	-	✓	✓	✓	✓	✓
Configurable in-/outputs	4 per channel	4	2 per channel	4	2 per channel	4
Included analytics	-	Audio detection	Audio detection	Audio detection	Audio detection	Audio detection
Pan/tilt/zoom support	✓	✓	✓	✓	✓	✓
Power	-	DC, PoE	-	DC, PoE	DC	DC, PoE
Serial connectors	RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485
Type	Blade	Standalone	Blade	Standalone	Standalone	Standalone
Special features	-	Rugged, Operating conditions -40°C - 75°C (-40°F - 167°F), SFP slot	-	Coax PTZ Control	Two-way audio on one channel	Supports power output for analog camera

Video encoders

AXIS P72 Series			AXIS M70 Series		
					
Max. video resolution	720x480 (NTSC) 720x576 (PAL)				
Max. frames per second	25/30	25/30	25/30	25/30	15
Video source (BNC composite inputs)	4	16	4	16	4
Audio support	✓	✓	✓	-	-
Configurable in-/outputs	4	4 per channel	4	-	-
Included analytics	Audio detection	Audio detection	Audio detection	-	-
Pan/tilt/zoom support	✓	✓	✓	✓	✓
Power	-	AXIS PS-P power supply (included)	DC, PoE	AXIS PS-P power supply (included)	DC, PoE
Serial connectors	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485
Type	Blade	Standalone	Standalone	Standalone	Standalone
Special features	-	SFP slot	-	-	-

Rack solutions

30

	12 Channel Rack	84 Channel Rack
		
Number of slots	3	14
Blades supported	AXIS Q7436 AXIS Q7414 AXIS P7224	AXIS Q7436 AXIS Q7414 AXIS P7224
Maximum number of channels	18	84
Rack size	1U	5U
Rack width (inch)	19	19
Built-in power supply	Power supply	Two redundant power supplies
Network	One Ethernet 10BASE-T/100BASE-TX/1000BASE-T (Gigabit Ethernet) port	Four Ethernet 10BASE-T/100BASE-TX/1000BASE-T (Gigabit Ethernet) ports, Four SFP slots

Accessories**System devices****Housings & cabinets**

31

Access control accessories**Switches**

Enable efficient connection among networked-based devices

**Audio systems accessories****PoE products**

For powering up your PoE device via an Ethernet cable

**Network video accessories****Media converters & PoE extenders**

Solutions for your Ethernet, Fiber or Coaxial connections

**Canon accessories****I/O devices**

Enhanced detection for motion and audio both indoors and outdoors

**Decoders**

Enabling analog or digital monitors to connect and to display live video streaming



For more information, visit www.axis.com/accessories

Axis network video housings & cabinets, worldwide

Product**Compatible with:**

AXIS T92E Housing Series
Aluminum construction
Indoor/Outdoor
AXIS T92E05: Power not required
AXIS T92E20: PoE IEEE 802.3af or High PoE

AXIS T92E05:
AXIS M11 Series,
AXIS P13 Series
AXIS T92E20:
AXIS M1113,
AXIS M1114,
AXIS P13 Series,
AXIS Q16 Series



AXIS T93F Housing Series
Impact-resistant polymer, Indoor/Outdoor
AXIS T93F05: Power not required
AXIS T93F10: 12–28 V DC; 20–24 V AC
AXIS T93F20: PoE IEEE 802.3af or High PoE

AXIS M1124, AXIS M1125 (AXIS T93F05/T93F20)
AXIS P13 Series
AXIS Q16 Series



AXIS T93G05 Protective Housing
Impact-resistant polymer, Indoor/Outdoor
Power not required

AXIS M1124
AXIS M1125



AXIS T93C10 Outdoor Housing

AXIS Q1659 10-22 mm
AXIS Q1659 100 mm
AXIS Q1659 24 mm
AXIS Q1659 35 mm
AXIS Q1659 50 mm
AXIS Q1659 85 mm



AXIS T98A-VE Cabinet Series:
AXIS T98A15-VE,
AXIS T98A16-VE,
AXIS T98A17-VE,
AXIS T98A18-VE,
AXIS T98A19-VE

See:
www.axis.com/products/enclosure-cabinets/axis-t98a-ve-surveillance-cabinet-series

Network video recorders

AXIS Camera Station video management software included

AXIS S20 Series				AXIS S10 Series			AXIS S90 Series		
									
Compatible with all Axis network cameras and encoders including HD, Standard resolution, High resolution, Pan Tilt Zoom and Thermal cameras with firmware 4.30 or later.									
Number of channels and licenses	24	16	8	48 (Upgradable to 64)	32 (Upgradable to 48)	16 (Upgradable to 32)	Desktop terminal, no licenses included	Desktop terminal, no licenses included	
Memory	1x 8GB	1x 8GB	2x 4GB	2x 4GB	2x 4GB	2x 4GB	2x 4GB	2x 4GB	
Storage	3x 4TB	2x 4TB	1x 4TB	6x 4TB (20TB usable space after RAID)	4x 4TB (12TB usable space after RAID)	2x 4TB	500GB	500GB	
Operating system	Microsoft Windows 10 IoT Enterprise								
Live Video streams	25 split views or 1x 4K Ultra HD views	25 split views or 1x 4K Ultra HD views	25 split views or 1x 4K Ultra HD views	-	-	25 split views or 1x 4K Ultra HD views	25 split views or 3x 4K Ultra HD views	25 split views or 1x 4K Ultra HD views	
Recording	384 Mbit/s	256 Mbit/s	128 Mbit/s	64 Channels 512 Mbit/s	48 Channels 384 Mbit/s	32 Channels 256 Mbit/s	-	-	
Power	Max: 500 W, 100 to 240 V AC 277 W PoE Dedicated	Max: 500 W, 100 to 240 V AC 277 W PoE Dedicated	Max: 280 W, 140 W PoE Dedicated	Max: 495 W, 100 to 240 V AC	Max: 350 W, 100 to 240 V AC	Max: 365 W, 100 to 240 VAC	Max: 365 W, 100 to 240 VAC	Max: 315 W, 100 to 240 VAC	
Connectors	2x USB 2.0, 2x USB 3.0, 1x VGA, 1x HDMI, 1x eSATA, 24x PoE RJ45, 2x Switch uplink RJ45, 2x Server LAN RJ45	2x USB 2.0, 2x USB 3.0, 1x VGA, 1x HDMI, 1x eSATA, 16x PoE RJ45, 2x Switch uplink RJ45, 2x Server LAN RJ45	2x USB 2.0, 2x USB 3.0, 1x VGA, 1x HDMI, 8x PoE RJ45, 2x Switch uplink RJ45, 2x Server LAN RJ45	4x USB 2.0, 2x VGA, Serial port, 4x Ethernet, 2x Power inlet	1x USB 2.0, 2x USB 3.0, 2x VGA, Serial port, 2x Ethernet, 2x Power inlet	6x USB 2.0, 4x USB 3.0, 1x Display Port, 1x Dual Link DVI-I, Ethernet, Line-in/out	6x USB 2.0, 4x USB 3.0, 4x Mini Display Port, 1x VGA, 1x Dual Link DVI-I, Ethernet, Line-in/out	6x USB 2.0, 4x USB 3.0, 1x Display Port, 1x Dual Link DVI-I, Ethernet, Line-in/out	
Supported monitors	2	2	2	Complete with Desktop Terminal	Complete with Desktop Terminal	2	4	2	
Warranty	3 years	3 years	3 years	3 years, hardware replacement service					
Other	Rack mounting brackets	Rack mounting brackets	Mounting brackets	-	-	-	Complete with either AXIS S1032 Mk II or AXIS S1048 Mk II	Complete with either AXIS S1032 Mk II or AXIS S1048 Mk II	

Network audio systems

Network speakers			
	AXIS C3003-E	AXIS C2005	AXIS C1004-E
Form factor	Horn	In ceiling	Cabinet
Background music	-	✓	✓
Voice announcements	✓	✓	✓
Onboard audio clips	✓	✓	✓
Amplifier (Watt)	7	6	6
Power	PoE	PoE	PoE
Sound pressure (1m@1W in dB)	>121	>95	>96
Frequency response	280 Hz - 12,5 kHz	45 Hz - 20 kHz	60 Hz - 20 kHz
Memory card slot	-	✓	✓
Built-in mic	✓	✓	✓
IP rating	IP66/IP67	-	IP45
Outdoor ready	✓	-	✓
Special features	VAPIX, ACAP, SIP	AXIS Audio Player included, VAPIX, ACAP, SIP	AXIS Audio Player included, VAPIX, ACAP, SIP

Access control

Network door stations		
	AXIS A8004-VE	AXIS A8105-E
Open platform	✓	✓
Max. video resolution	1280x720	1920x1200
Horizontal field of view	97°	180°
Dimensions (H x D x W)	260 x 140 x 55.5 mm 10 x 5.5 x 2.2 inch	147.5 x 35 x 48 mm 5.81 x 1.38 x 1.89 inch
Max. frames per second	25/30	50/30
Min. illumination (Color)	0.4	1.96
Min. illumination (B/W)	-	-
Audio support	✓	✓
Built-in mic	✓	✓
Built-in speaker	✓	✓
Ports	2x Relay output 4x I/O, Line out	1x Relay output 2x I/O
Included analytics	Audio detection, Shock detection	Audio detection, Shock detection
Power	PoE, PoE+	DC, PoE
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP65/NEMA 4X
WDR	Dynamic Capture	Forensic Capture
Zipstream	-	✓
SIP (VoIP)	✓	✓
Special features	ACAP, Digital PTZ, IK08	ACAP, Digital Corridor Format, Digital PTZ, Mullion style installation, UL294

Network door controllers		
	AXIS A1001 with embedded AXIS Entry Manager	AXIS A1001 with partner software
Open platform	✓	✓
Door controllers per system	33	Partner dependant
Readers per system	66	Partner dependant
Readers	≤ 2	≤ 2
Credentials	≤ 400	≤ 50 000
Power	DC, PoE	DC, PoE
Plenum rated	✓	✓
UL 294	✓	✓
Supports most reader types	✓	✓

Card readers		
	AXIS A4011-E	AXIS A4010-E
Keypad	✓	-
LED symbols	✓	✓
RS-485 – OSDP	✓	✓
Power	DC	DC
Outdoor ready	IP54	IP65

Network I/O relay modules			
	AXIS A9188	AXIS A9188-VE	AXIS A9161
Open platform	✓	✓	✓
Digital I/O	✓	✓	✓
Number of I/O	8	8	6
Number of relays	8	8	1
Power in	DC, PoE, PoE+	DC, PoE, PoE+	DC, PoE
Power out	DC	DC	DC
Outdoor ready	-	✓	-
Approvals	-	UL 294 with AXIS T98A15-VE	-

Video management software

		AXIS Companion VMS	AXIS Camera Station
Number of cameras	≤ 16		≤ 100
Product compatibility	AXIS Companion product line Axis total portfolio (as from firmware 5.50)		Axis total portfolio, Onvif
Licenses	Free		Licensed, included in AXIS S10 and AXIS S20 Series
Triggers and actions	Moderate		Advanced
Alarm handling	Moderate		Advanced
Multi-site management	Yes		Yes
Main interface	Mobile app, PC		Windows client, supporting multiple monitors, joystick and controlboard
Free mobile app	✓		✓

Analytics & other applications

Business intelligence applications

AXIS Store Optimization Suite:

- ◆ AXIS People Counter
- ◆ AXIS 3D People Counter
- ◆ AXIS Queue Monitor
- ◆ AXIS Demographic Identifier
- ◆ AXIS Occupancy Estimator
- ◆ AXIS Store Reporter
- ◆ AXIS Store Data Manager

Security applications

AXIS Loss Prevention Suite:

- ◆ AXIS Tailgating Detector
- ◆ AXIS Direction Detector
- ◆ AXIS Random Selector

AXIS Perimeter Defender
AXIS Digital Autotracking
AXIS Cross Line Detection
AXIS Video Motion Detection





Zipstream

Lightfinder

Forensic WDR

OptimizedIR

Electronic Image Stabilization



More information on ONVIF can be found on Axis website:
www.axis.com/technologies/onvif or www.onvif.org



TESTED WITHOUT COMPROMISE

Ensuring quality in Axis cameras

Axis cameras are incredibly tough. We know, because we've subjected them to the hardest tests to make sure they're resilient against water, vibrations, impacts, abrasions, humidity – and more. Because of this, our customers can rest assured they'll always get the best performance – no matter what their cameras are faced with. And that, we believe, is the true value of quality.



30 STRIKES to the cameras' weakest points ensures they can stand up to the toughest hits.



600 SHOCKS

on the three axes at a rapid acceleration of 147 m/s^2 (482 ft/s^2)

ensures a mounted camera can be rocked violently back and forth without breaking.

5.5 HOURS


of high-frequency vibration and more than 1 million test cycles ensures the camera won't break – even if a freight train thunders by every hour, every day, for years.

All components are tested to withstand temperatures of at least

5°C (9°F)

above or below the product specification.

That means they can handle extra hot – and cold – days.

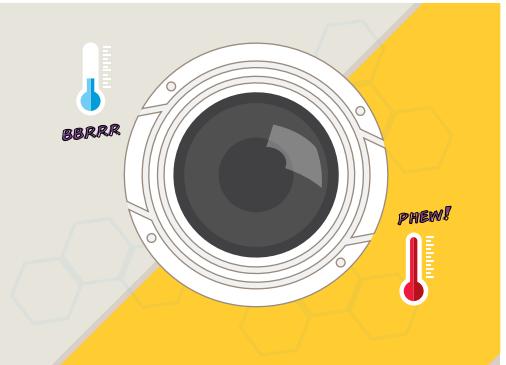

44,000 HOURS of round-the-clock monitoring at Axis sites after launch.


So we know how the product ages and can improve it over time.



0% to 100%

humidity in controlled climate chambers ensures the camera can perform in the stickiest of climates.

100 LTRS (26 GALLONS)
at least of high-pressure water spray per minute means they can handle the wildest weather.
(That's as powerful as a fire hose spraying directly onto the camera from just a few meters away.)

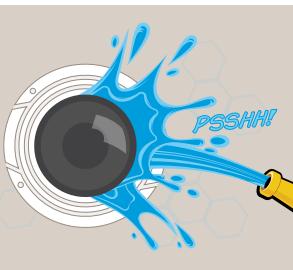

AND THAT'S WHAT HELPS TO MAKE AXIS CAMERAS
NUMBER 1.



To learn more about Axis' quality assurance work, visit axis.com/quality

Ihre Axis DACH Vertriebsansprechpartner

Deutschland Key Account Manager



Torsten Lange
PLZ: 0, 1, 98, 99
Tel: +49 171 22 40 323
torsten.lange@axis.com



Thorsten Giesecke
PLZ: 2, 3 (außer 35, 36)
Tel: +49 160 289 99 38
thorsten.giesecke@axis.com



Boris Weber
PLZ: 35, 36, 50-57, 60-66
Tel: +49 151 17 07 80 93
boris.weber@axis.com



Torsten Mölders
PLZ: 4, 58, 59
Tel: +49 151 46 76 20 41
torsten.moelders@axis.com



Michael Triebler
PLZ: 67-69, 7, 88, 89
Tel: +49 160 94 56 98 44
michael.triebler@axis.com



Torsten Kasten
PLZ: 8, 9 (außer 88, 89, 98, 99)
Tel: +49 171 587 42 45
torsten.kasten@axis.com



Thorsten Grimm
Medium Business
Tel: +49 151 216 25 798
thorsten.grimm@axis.com



Schweiz
Key Account Manager



Bertrand Schütz
PLZ: 1, 2, 3, 4, 50-52, 57, 60-62
Tel: +41 79 834 38 18
bertrand.schuetz@axis.com



Mirko Ambrico
PLZ: 53-56, 63-69, 7, 8, 9
Tel: +41 79 231 33 33
mirko.ambrico@axis.com



Österreich
Key Account Manager



Roman Plass
Tel: +43 664 84 18 981
roman.plass@axis.com



Anke Sperger
PLZ 0, 1, 2, 3 (außer 35, 36),
98, 99, Österreich
Tel: +49 89 3588 17 - 226
anke.sperger@axis.com



Sonja Simonutti
PLZ 35, 36, 4, 5, 60-66, 8, 9
(außer 88, 89, 98, 99)
Tel: +49 89 3588 17 - 246
sonja.simonutti@axis.com



Gabriele Ziese
Medium Business DACH
PLZ 67-69, 7, 88, 89
Tel: +49 89 3588 17 - 223
gabriele.ziese@axis.com



Tayfun Buyar
Small Business DACH
Tel: +49 89 3588 17 - 213
tayfun.buyar@axis.com



Ann Etienne
Schweiz, BeLux
Tel: +49 89 3588 17 - 241
ann.etienne@axis.com





Besuchen Sie unser Axis Experience Center in Ismaning bei München und entdecken Sie die zahlreichen Möglichkeiten, die Axis Produkte bieten!

Axis Communications GmbH
Adalperostraße 86
85737 Ismaning, Deutschland
Tel.: +49 89 3588 17 0
insidesales-dach@axis.com

Vertriebspartnerprogramm

Klare Umsatzvorteile.



Das Axis Communications' Vertriebspartnerprogramm ist so konzipiert, dass **Systemintegratoren, Fachhändler (VAR – Value Added Reseller) und Installateure** die führende Marktposition von Axis geschäftlich verwerten können. Da wir unserem Vertriebsnetz einen hohen Stellenwert einräumen, sehen wir unsere Partner als logische Erweiterung unseres Teams, die bei unserer Marktstrategie und dem Gesamterfolg unseres Unternehmens eine Schlüsselrolle einnehmen. Eine rabattierte Demoausstattung (nicht zum Wiederverkauf), höhere Gewinnmargen, Schulungen für Fachleute und Mitarbeiter in Technik und Vertrieb durch die Axis Communications' Academy gehören zu den vielen Vorzügen dieses Programms und bieten den Vertriebspartnern von Axis klare Vorteile im Wettbewerb.

- > Nutzen Sie den Vorteil höherer Gewinnspannen und die Unterstützung bei der Projektpreisermittlung
- > Sie erhalten Sonderrabatte auf Demoausstattung (nicht zum Wiederverkauf, NFR)
- > Überprüfen und erweitern Sie Ihre Netzwerk- Video Kompetenz
- > Profitieren Sie von der führenden Marktposition von Axis und dem Axis Partner Netzwerk
- > Vereinfachen Sie den Verkauf mit fokussierten Tools und Marketing

Partnerkategorie und -ebenen

Das Vertriebspartnerprogramm von Axis ist offen für Unternehmen, die derzeit eine Geschäftsbeziehung zu einem autorisierten Axis Distributor unterhalten oder aufbauen wollen. Es gibt drei Ebenen der Partnerschaft, die mit ihren klaren Vorzügen und Anforderungen darauf ausgelegt sind, den beiderseitigen Erfolg zu fördern und die Investition unserer Partner in den Vertrieb von Axis Produkten zu belohnen.

ANFORDERUNGEN AN PARTNER	Autorisiert	Solution Silver	Solution Gold
Kauf bei einem autorisierten Axis Distributor ³	●	●	●
Angebot von Installationen vor Ort und Erstsupport	●	●	●
Bietet Komplettlösungen und Demoausstattung		●	●
Ertragsziele		●	●
Axis Communications' Academy – Netzwerkvideo Basisschulung	empfohlen	Mind. 1 pro Land	Mind. 2 pro Land
Axis Certified Professional Mitarbeiter ¹	empfohlen	Mind. 1 pro Land	Mind. 2 pro Land
Geheimhaltungsvereinbarung (NDA – Non Disclosure Agreement)		●	●
Jahresumsatz & Marketingplan		1	●



VORTEILE FÜR PARTNER	Autorisiert	Solution Silver	Solution Gold
VERTRIEBS- UND MARKETING-SUPPORT¹			
Chance ² für höhere Gewinnspannen	◆	◆	◆
Rabatte für Demoausstattung (nicht zum Wiederverkauf, NFR)	◆	◆	◆
UVP-Preisliste des Herstellers auf Axis Partnerseiten	◆	◆	◆
Lead-Forwarding	1	◆	nicht uneingeschränkt
Chance für Projektpreisbildung	◆	◆	◆
Spezieller Account Manager ¹	1	◆	◆
Sicherer Zugang zu Axis Partnerseiten, Marketingmaterial und einzigartigen Verkaufs-Tools	◆	◆	◆
Monatliche eNews	◆	◆	◆
Begrüßungskit und Anerkennungszertifikat / Plakette	◆	◆	◆
Listeneintrag in der Axis Bezugsquellen-Webseite (abhängig von den allgemeinen Geschäftsbedingungen)		◆	◆
Chancen für Co-Marketing		◆	◆
Teilnahmemöglichkeit an Veranstaltungen für Axis Partner	lokal	lokal/regional	lokal/regional/weltweit
Zugang zum Axis Partnernetzwerk von Softwareentwicklern, Technologielieferanten und Beratern	◆	◆	◆
Möglichkeiten zur Gestaltung von Events für Endkunden im Axis Experience Center			◆
VERTRIEBSTECHNIK			
A&E Spezifikationen	◆	◆	◆
Systemdesign und technischer Support		1	◆
TECHNISCHER SUPPORT¹			
Technischer Support nach dem Verkauf	◆	◆	◆
Verbesserter Produktersatzservice		kostenpflichtig	kostenlos
AUSBILDUNG¹			
Technische Schulungen und Vertriebsschulungen – Axis Communications' Academy	◆	◆	◆
Online-Kurse	◆	◆	◆
Axis Zertifizierungsprogramm	◆	◆	◆

¹ Wo verfügbar. Kann je nach Standort, Umfang des Verkaufspotenzials und Partnerebene variieren.² Axis unterstützt Distributoren mit Partnerrabatten abhängig von der Partnerebene. Der tatsächliche Verkaufspreis wird durch Ihren Distributor festgelegt.³ Partner müssen Axis die Kontonummern ihrer derzeitigen Distributoren mitteilen.◆ Silver Partner profitieren von höheren Gewinnmargen², erweiterten Chancen im Partnernetzwerk und bevorzugtem technischen Support im Vergleich zu autorisierten Partnern.◆ Gold Partner profitieren von höheren Gewinnmargen², regelmäßigen Meetings, erweiterten Chancen im Partnernetzwerk, priorisiertem Listing im Internet, gemeinsam finanzierten Marketingchancen und priorisiertem technischen Support im Vergleich zu Silver Partnern. Gold Partner haben höhere Ertragsziele im Vergleich zu Silver Partnern.

Ein Partner für die Zukunft!

Registrieren Sie sich jetzt unter www.axis.com/partner, und werden Sie Vertriebspartner von Axis.



About Axis Communications

Axis offers intelligent security solutions that enable a smarter, safer world. As the market leader in network video, Axis is driving the industry by continually launching innovative network products based on an open platform – delivering high value to customers through a global partner network.

Axis has long-term relationships with partners and provides them with knowledge and ground-breaking network products in existing and new markets.

Axis has more than 2,700 dedicated employees in more than 50 countries around the world, supported by a global network of over 90,000 partners. Founded in 1984, Axis is a Sweden-based company listed on NASDAQ Stockholm under the ticker AXIS.

For more information about Axis, please visit our website www.axis.com.

Distributed by: